

### Kestrel Series

# K-2030 Mini



ideal depth

LM79

LM80

L70:5+ YEARS


## Specifications

Viewing Angle	120°
Watts	0.33w/mod (1.65w/ft.)
Input Voltage	12vDC
Modules/Foot	5/ft fully stretched
Protection Grade	IP67
Packaging	Anti-static bag, 300 modules (60 ft)/bag
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-25 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-25 ~ +70 °C / -13 ~ +158 °F
Cascade	50 mods single-ended power feed (pcs) 100 mods double-ended power feed (pcs)


## Features

- Compact miniature module
- Ideal white point
- For small stroke and low profile signs
- Guaranteed life over 50,000 hours

Color	Part#	Color Temp	Lumens
Pure White	HLED-K2030W	7000K	24 lm/mod (120 lm/ft.)
Warm White	HLED-K2030WWARM	3000 ~ 3300K	24 lm/mod (120 lm/ft.)
Red	HLED-K2030R	620 ~ 625K	6 lm/mod (30 lm/ft.)

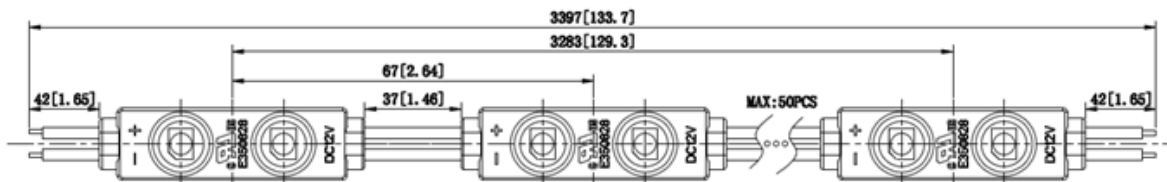


## Profile Drawings

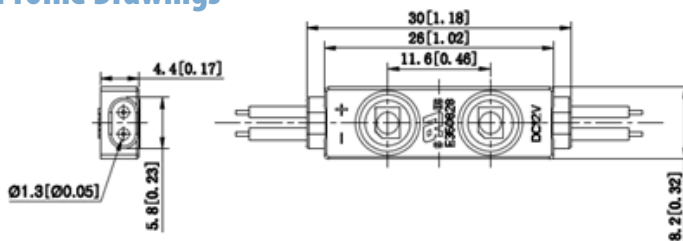

MODEL	MAX POWER SUPPLY LOAD		
	35W	60W	100W
K-2030	106 mods	181 mods	303 mods

**HanleyLED recommends underloading any power supply by 15%**

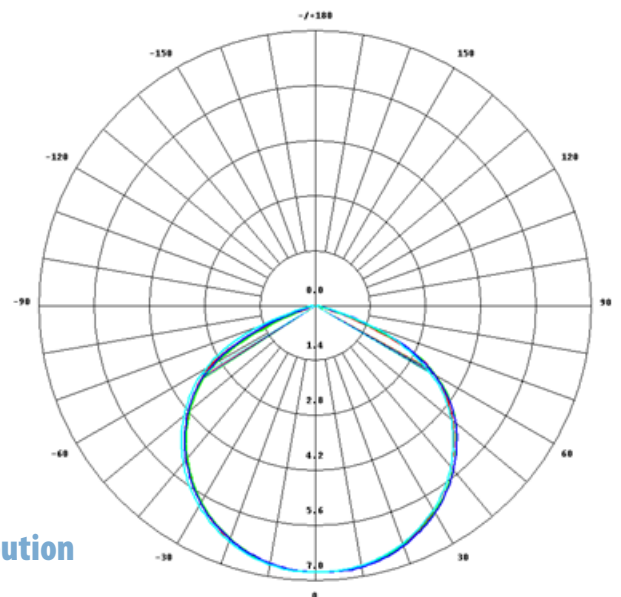

## Light Distribution