

HanleyLED

HanleyLED P-H2O3072 Spec Sheet

Peregrine Series

P-H2O3072

Specifications

Viewing Angle	160°
Watts	.72w/mod (1.15w/ft.)
Input Voltage	12vDC
Modules/Foot	1.6/ft. fully stretched
Protection Grade	IP68
Packaging	Anti-static bag, 80 mods (50 ft)/bag
Warranty	7 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -13 ~ +158 °F
Cascade	80 mods Single-ended Power Feed (pcs) 160 mods Double-ended Power Feed (pcs)









 IP68


LM79 LM80 L70:5+ YEARS

Features

- IP68
- As low as 3" from sign face
- Ideal for shallow, deep and halo channel letter lighting
- Extremely efficient
- 111 lumens/watt
- 80 mods in a single series/cascade
- UL Retrofit Kit Classified

Color	Part#	Color Temp	Lumens
Pure White	HLED-PH203072	7000k	80 lm/mod (128 lm/ft.) (111 lm/watt!)

Light Distribution

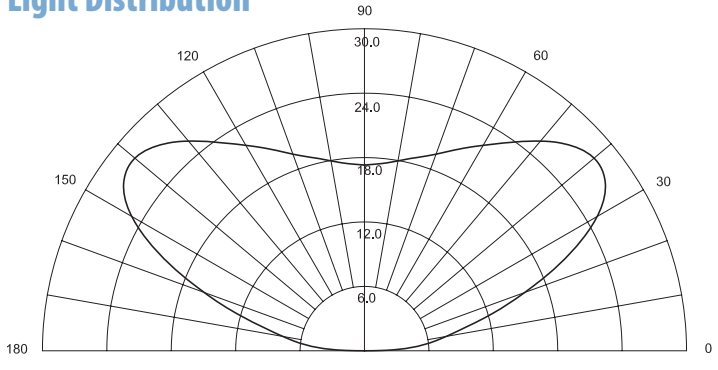

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
HLED-PH203072	48 mods	83 mods	138 mods	208 mods

HanleyLED recommends underloading any power supply by 15%

Profile Drawings

