

HanleyLED

HanleyLED TS-30650 Spec Sheet

Trade Show Light Bar TS-30650



**5 LED
BAR ALSO
AVAILABLE**

Specifications

Beam Angle	10° x 40°
Watts	6.5 w/piece
Input Voltage	24vDC
Protection Grade	IP33
Packaging	Sold 10pc/box
Warranty	5 Year (Product)
Operating Temp.	-25 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-25 ~ +70 °C / -13 ~ +158 °F
Product Length	11.7"

Features

- Edge light bar
- Ideal for interior display applications (Fabric or acrylic*)
- Can use in display boxes up to 96" x 96"
- EZ connect ends for simple, fast installation
- Lens-guard to prevent hot spots along frame edge



warranty
5^Y

CC
constant
current

3-12"
ideal depth
single-sided
or
double-sided

24v





Color	Part#	Color Temp	Lumens
Neutral White	HLED-TS306505K	5000k	700 lm/pc
Pure White	HLED-TS306565K	6500k	700 lm/pc

Wire Extensions



Part#	Length
HLED-TSWIRE12	12"
HLED-TSWIRE48	48"
HLED-TSWIRE96	96"
HLED-TSWIRE120	120"

Profile Drawings

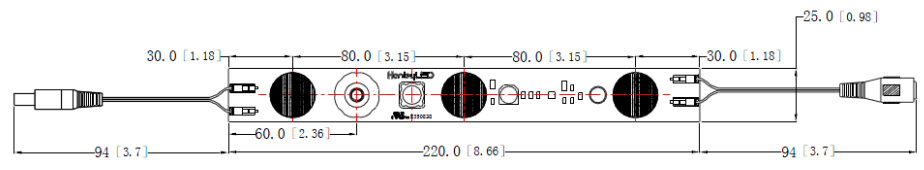

MAX POWER SUPPLY LOAD

MODEL	H90W-ADP24V
HLED-TS306505K	13 bars
HLED-TS306565K	

HanleyLED recommends underloading any power supply by 15%

** NOTE: Different fabrics diffuse differently at various depths. We recommend testing your fabric of choice for ideal illumination.*

Sold Separately

H90W-ADP24V - Power Supply
- 24v, 90w
- Adaptor-style power supply to pair with HanleyLED TS bars

