

### Wingspan Series

# WS-1240





LM79 LM80 L70:5+ YEARS










## Specifications

<b>Viewing Angle</b>	170° wing span
<b>Watts</b>	2.4w/mod (3.12 w/ft.)
<b>Input Voltage</b>	12vDC
<b>Modules/Foot</b>	1.3/ft. fully stretched
<b>Protection Grade</b>	IP65
<b>Packaging</b>	Anti-static bag, 66 modules (51 ft)/bag
<b>Warranty</b>	5 Year (Product) / 5 Year (Labor)
<b>Operating Temp.</b>	-25 ~ +60 °C / -13 ~ +140 °F
<b>Storage Temp.</b>	-25 ~ +70 °C / -13 ~ +158 °F
<b>Cascade</b>	33 mods single-ended power feed (pcs) 66 mods double-ended power feed (pcs)


Color	Part#	Color Temp	Lumens
Pure White	HLED-WS1240W	7000K	215 lm/mod (279.5 lm/ft.)

## Features


- 24" stroke at 10" from face
- Ideal for lighting cabinets and large channel letters 6" deep or more
- Most versatile solution for cabinet lighting
- Guaranteed life over 50,000 hours
- Super wide wing span for extreme spacing in deep signs



## Profile Drawings

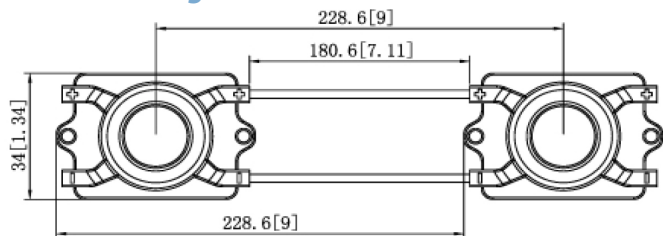

## Light Distribution

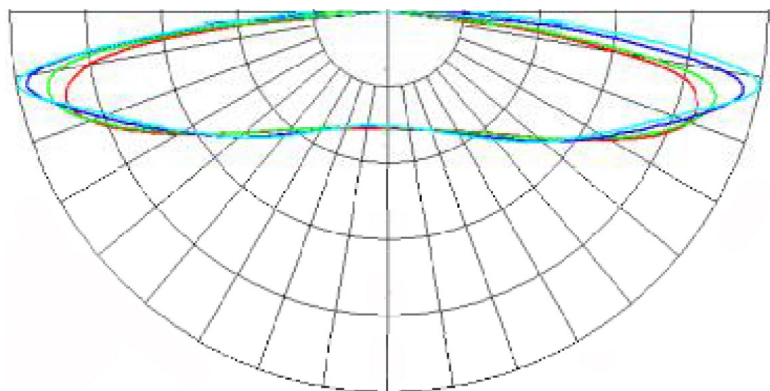

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
WS-1240	14 mods	25 mods	41 mods	62 mods

**HanleyLED recommends underloading any power supply by 15%**