

HanleyLED

HanleyLED HFLX-RGB48 Spec Sheet

Flex Strip Series HFLX-RGB48



LM79 LM80

Specifications


Type	RGB color changing strip
Beam Angle	115°
Input Voltage	12vDC
Power	1m: 14.4w / 5m: 48w
Length	5m
Protection Grade	IP33
Packaging	Anti-static bag
Warranty	5 Year (Product)
Operating Temp.	-40 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -13 ~ +158 °F

Features

- RGB color changing LED strips
- Easy installation: wires pre-soldered & doubled-sided 3M™ tape for application
- For indoor signs, shallow cabinets or push through letters
- For lighting enhancement or decorative lighting applications
- Easy connect wires available ([download info here](#))

Profile Drawings

Unit: mm [in]

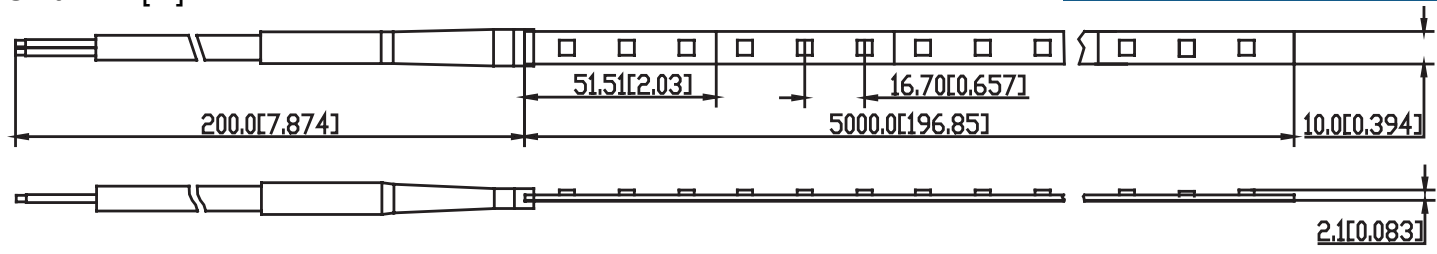

Color	Part#	Color Temp	Lumens
Red		620-625k	120 lm/m
Green	HFLX-RGB48	525-530k	180 lm/m
Blue		465-470k	60 lm/m

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
All models	2 meters	5 meters	10 meters	15 meters

Max-Cascading Quantity: 5 meters

Controllers and Amplifiers
available through our distributor: Grimco

Application of RGB Modules

