

# HanleyLED

## HanleyLED P-1036W Spec Sheet

### Peregrine Series P-1036W










**LM79** **LM80** **L70:5+ YEARS**

ideal depth from face

### Specifications


Viewing Angle	160°
Watts	0.36w/mod (1.08w/ft.)
Input Voltage	12vDC
Modules/Foot	3/ft. fully stretched
Protection Grade	IP65
Packaging	Anti-static bag, 200 mods (66.67ft)/bag
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -40 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -40 ~ +158 °F
Cascade	100 mods Single-ended Power Feed (pcs) 200 mods Double-ended Power Feed (pcs)

### Features

- Bin code identical to P-2072 and P-4144
- As low as 2.0" from sign face
- Ideal for mini letters and when needing to mix with P-2072 and P-4144 for color matching
- Guaranteed life over 50,000 hours
- UL Retrofit Kit Classified
- DIY Layout Tool at [hanleyledsolutions.com](http://hanleyledsolutions.com) (Available in English, Spanish, and French)

Color	Part#	Color Temp	Lumens
Pure White	P-1036W	7000k	33 lm/mod (99 lm/ft.)

### Light Distribution

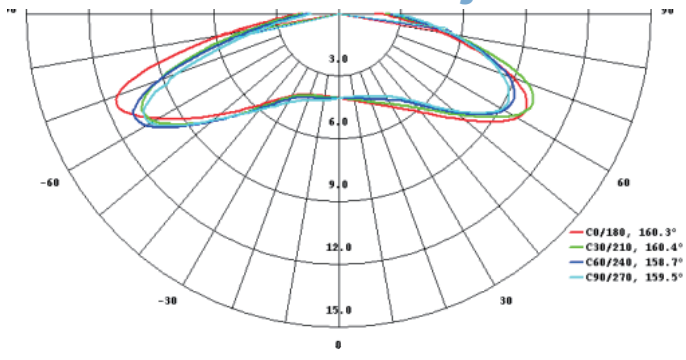

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
P-1036W	97 mods	166 mods	277 mods	416 mods

### Profile Drawings

Unit : mm [in]

