

HanleyLED

HanleyLED P-H2O3140 Spec Sheet

Peregrine Series P-H2O3140



LM79 LM80 L70:5+ YEARS

Specifications


Viewing Angle	170°
Watts	1.4w/mod (2.4w/ft.)
Input Voltage	12vDC
Modules/Foot	1.6/ft. fully stretched
Protection Grade	IP68
Packaging	Anti-static bag, 50 mods (31.25 ft)/bag
Warranty	7 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -13 ~ +158 °F
Cascade	50 mods Single-ended Power Feed (pcs) 100 mods Double-ended Power Feed (pcs)

Features

- IP68
- As low as 6" from sign face
- Guaranteed life over 50,000 hours
- Extra bright output 140 lumens/module
- 50 mods in a single series/cascade
- UL Retrofit Kit Classified

Color	Part#	Color Temp	Lumens
Pure White	HLED-PH203140W	7000k	140 lm/mod (224 lm/ft.) <i>(100lm/watt!)</i>

Light Distribution

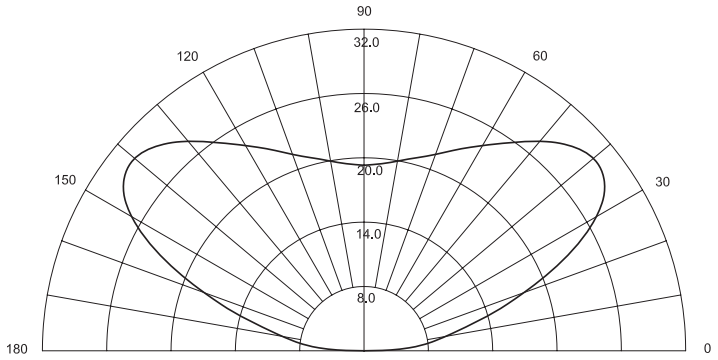

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
HLED-PH203072	25 mods	42 mods	71 mods	107 mods

HanleyLED recommends underloading any power supply by 15%

Profile Drawings

