

### Peregrine Series

# P-4144



**LM79 LM80 L70:5+ YEARS**

## Specifications


Viewing Angle	160°
Input Voltage	12vDC
Watts	1.44w/mod (2.32w/ft.)
Modules/Foot	1.61/ft. fully stretched
Protection Grade	IP65
Packaging	Anti-static bag, 50 modules (31ft)/bag
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -40 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -40 ~ +158 °F
Cascade	25 mods single-ended power feed (pcs) 50 mods double-ended power feed (pcs)

## Features


- 15" stroke between rows
- Shallow and deep cabinet and letter application
- Most versital solution for cabinets lighting
- Guaranteed life over 50,000 hours
- UL Retrofit Kit Classified
- DIY Layout Tool at [hanleyledsolutions.com](http://hanleyledsolutions.com)  
(Available in English, Spanish, and French)

Color	Part#	Color Temp	Lumens
Pure White	HLED-P4144	7000K	140 lm/mod (225.4 lm/ft.)
Red	HLED-P4144R	620 ~ 625K	52 lm/mod (83.72 lm/ft.)

## Light Distribution

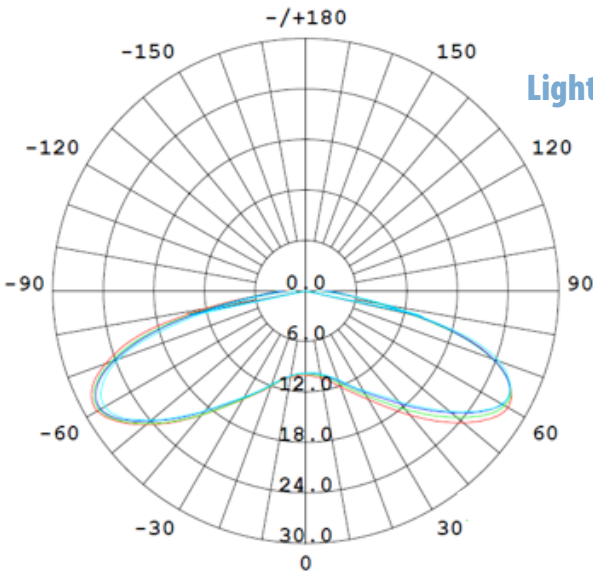

## Profile Drawings

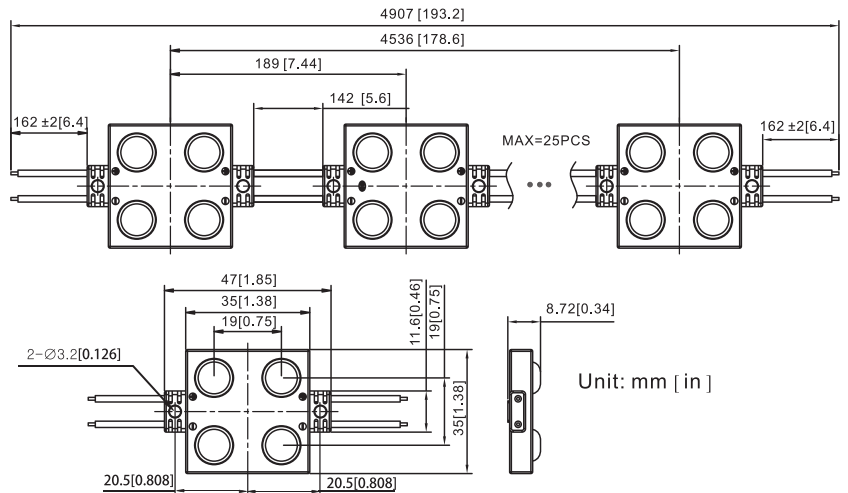

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
P-4144	24mods	41mods	66mods	104mods