

HanleyLED

HanleyLED WS-1240 Spec Sheet

Wingspan Series WS-1240



Specifications

Viewing Angle	170° wing span
Watts	2.4w/mod (3.12 w/ft.)
Input Voltage	12vDC
Modules/Foot	1.3/ft. fully stretched
Protection Grade	IP65
Packaging	Anti-static bag, 66 modules (51 ft)/bag
Warranty	5 Year (Product) / 5 Year (Labor)
Operating Temp.	-40 ~ +60 °C / -13 ~ +140 °F
Storage Temp.	-40 ~ +70 °C / -13 ~ +158 °F
Cascade	33 mods single-ended power feed (pcs) 66 mods double-ended power feed (pcs)

UL E350828

SP US 262904

warranty 5^P 5^L

CC constant current


6-18"
ideal depth

LM79 LM80 L70:5+ YEARS


Color	Part#	Color Temp	Lumens
Pure White	HLED-WS1240W	7000K	215 lm/mod (279.5 lm/ft.)

Features


- 24" stroke at 10" from face
- Ideal for lighting cabinets and large channel letters 6" deep or more
- Most versatile solution for cabinet lighting
- Guaranteed life over 50,000 hours
- Super wide wing span for extreme spacing in deep signs

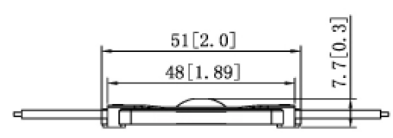

Profile Drawings

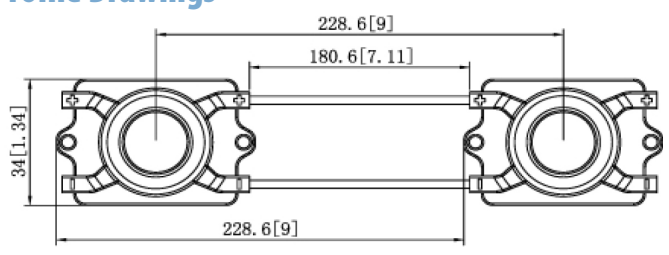

Light Distribution

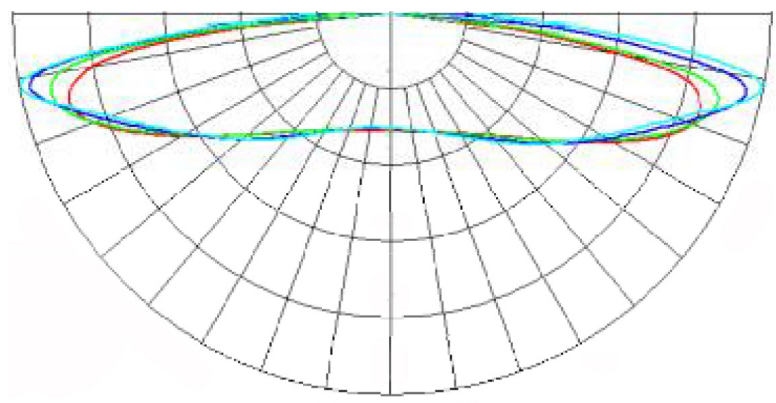

MODEL	MAX POWER SUPPLY LOAD			
	35W	60W	100W	150W
WS-1240	14 mods	25 mods	41 mods	62 mods

HanleyLED recommends underloading any power supply by 15%